

# SALES & ENGINEERING DATA

RATIO SERIES: **1:1**



FLUID P.S.I. RANGE: **20 - 120**

PD30X-XXX-XXX-B(03)

## 3" METALLIC DIAPHRAGM PUMP

RELEASED: 8-7-98  
REVISED: 12-16-02  
S-958

### DIMENSIONAL DATA

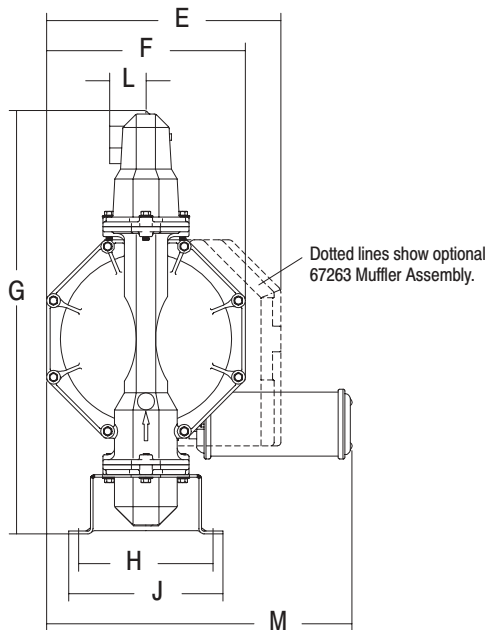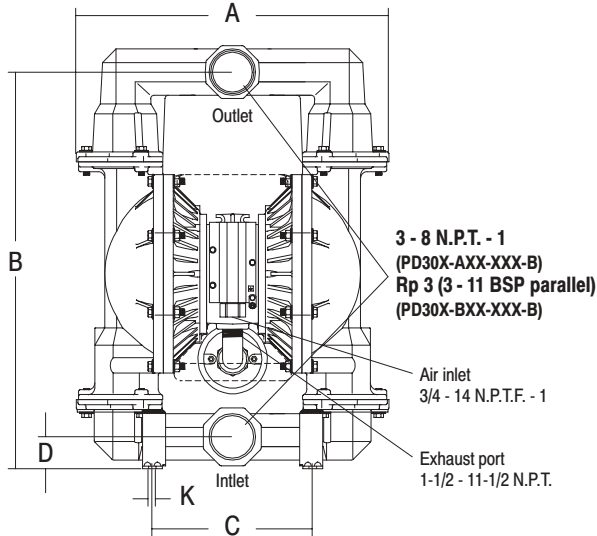

### DIMENSIONS

A see below	E 17-11/16" (449.2 mm)	J see below
B 30" (761.7 mm)	F 15" (381 mm)	K 9/16" (14.3 mm)
C 12-1/16" (306.5 mm)	G 32" (812.5 mm)	L 2-3/4" (69.9 mm)
D see below	H 10-5/32" (258 mm)	M 23-3/32" (586.3 mm)

	"A"	"D"	"J"
PD30X-XAX	23-5/8" (598.7 mm)	2-3/8" (60.3 mm)	11" (279.4 mm)
PD30X-XCX	23-5/8" (598.7 mm)	2-7/16" (61.1 mm)	11-11/16" (296.1 mm)
PD30X-XHX	23-1/8" (587.3 mm)	2-3/4" (69.9 mm)	11-11/16" (296.1 mm)
PD30X-XSX	23-1/8" (587.3 mm)	2-3/4" (69.9 mm)	11-11/16" (296.1 mm)

NOTE: Dimensions are shown in inches and (mm), supplied for reference only and are typically rounded up to the nearest 1/16 inch.

### SPECIFICATIONS

#### CONSTRUCTION

Model Series	PD30X-XXX-XXX-B(03)
Pump Type	Metallic, Air Operated, Double Diaphragm
Ratio	1:1
Material Inlet / Outlet (female)	
PD30X-AXX-XXX-B	3 - 8 N.P.T. - 1
PD30X-BXX-XXX-B	Rp 3 (3 - 11 BSP parallel)
Air Inlet (female)	3/4 - 14 N.P.T.F. - 1
Air Exhaust (female)	1-1/2 - 11-1/2 N.P.T.F. - 1
Weight	
PD30X-XAX-XXX-B	113 lbs (51.3 kgs)
PD30X-XCX-XXX-B	197 lbs (89.4 kgs)
PD30X-XHX-XXX-B	203 lbs (92.1 kgs)
PD30X-XSX-XXX-B	203 lbs (92.1 kgs)

[add 40 lbs (18.1 kgs) for stainless steel air motor section]

Air Section Service Kit	637302
Fluid Section Service Kit	637303-XX

PD30X-XXX- X   -B  
637303 -

Diaphragm Material  
Ball Material

EXAMPLE: Model #PD30A-AAP-AAA-B  
Fluid Section Service Kit is 637303-AA

#### PERFORMANCE

<b>Air Inlet Pressure Range</b>	
Ball check models	20 - 120 p.s.i. (1.4 - 8.3 bar)
Cone check models	20 - 100 p.s.i. (1.4 - 6.9 bar)
<b>Maximum Material Inlet Pressure</b>	10 p.s.i. (0.69 bar)
<b>Fluid Outlet Pressure Range</b>	
Ball check models	20 - 120 p.s.i. (1.4 - 8.3 bar)
Cone check models	20 - 100 p.s.i. (1.4 - 6.9 bar)
<b>Maximum Flow Rate (flooded inlet)</b>	
Ball check models	275 g.p.m. (1,041 l.p.m.)
Cone check models	195 g.p.m. (738.1 l.p.m.)
<b>Maximum Particle Size</b>	
Ball check models	3/8" dia. (9.5 mm)
Cone check models	3/4" dia. (18.75 mm)
<b>Maximum Temperature Limits</b>	200° F (93° C)
<b>Displacement / Cycle @ 100 p.s.i.</b>	2.8 gal. (10.6 lit.)
<b>Noise Level @ 70 p.s.i. - 50 c.p.m.</b>	83.0 db(A) <sup>②</sup>

#### Notes:

- ① Tested with 67263 muffer assembly installed.
- ② The pump sound pressure level has been updated to an Equivalent Continuous Sound Level (L<sub>Aeq</sub>) to meet the intent of ANSI S1. 13-1971, CAGI-PNEUROP S5.1 using four microphone locations.

#### ACCESSORIES:

- 66109 Air line Connection Kit
- 67263 Continuous Muffer
- 94117 Int. Muffer

INGERSOLL-RAND COMPANY  
P.O. BOX 151 • ONE ARO CENTER • BRYAN, OHIO 43506-0151

☎ (419) 636-4242 • FAX (419) 633-1674 ©2002 • PRINTED IN U.S.A.



# PERFORMANCE CURVES

## PD30X-XXX-XXX-B 3" METALLIC DIAPHRAGM PUMP

