


6HH-RP-BF6M1015C
 (max casing pr. - 185#)
 341 HP @ 2100 RPM (max.)
 (Pump #6HH-RP-F18DB)

Speed	Impeller Dia.	Style	Solids Dia.	N _S	Suction	Discharge	No. vanes
VARIOUS	16.44"	ENCLOSED	1.22"	1568	8"	6"	6

DOUBLE VOLUTE MOUNTING CONFIG: F, EM

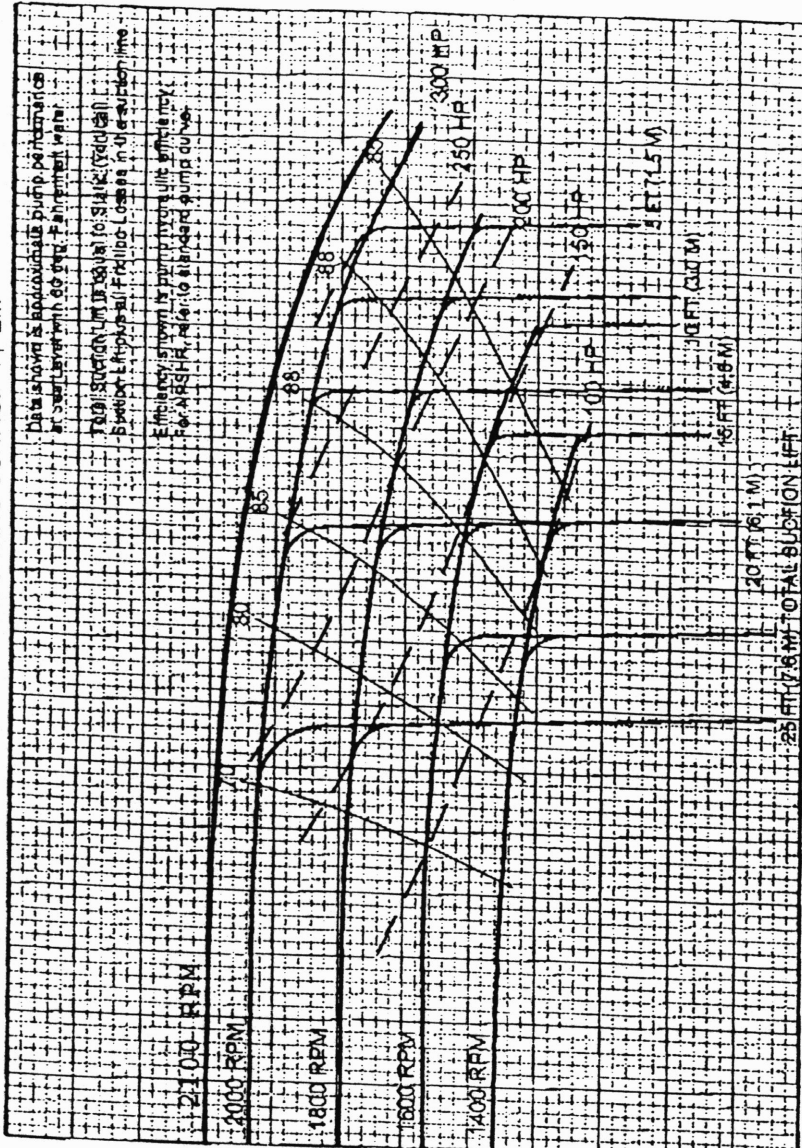

Feet x .305 = Meters
 Inches x 25.4 = Millimeters
 GPM x .227 = Cubic Meters/Hour
 GPM x 3.785 = Liters/Minute
 HP x .746 = KW

Performances shown are for cool water.
 Other liquids or mounting configurations may require performance adjustments.
 Add 1.5 HP for belt driven diaphragm vacuum pump. Performance curve does not include discharge check valve losses.
 © Cornell Pump Company

